


RFE-FRHF

Fire-resistant armoured pair instrumentation and communication cable 250V

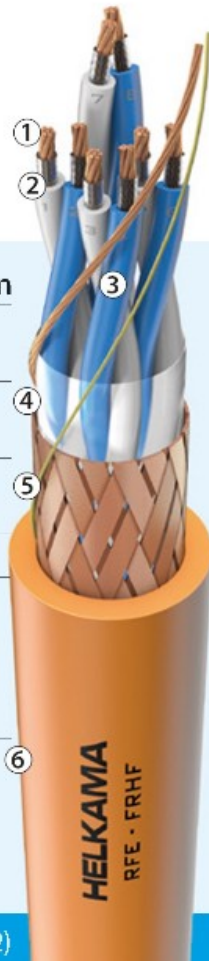

DESIGN:	STANDARDS:
1. Conductor - stranded copper conductor - tinned stranded copper conductor on request	IEC 60092-376, design IEC 60228, class 2
2. Insulation - Mica tape - XLPE plastic	IEC 60092-360
3. Twisted pair - two insulated cores twisted together to form a pair See next page for Quad	
4. Bedding - filler tape	
5. Armour - drain wire (in all sizes) - copper wire braid, coverage > 94% - tinned copper wire braid on request - the armour serves as a collective screen	IEC 60092-350
6. Sheath - polyolefine plastic, SHF1, standard colour orange - on request thermosetting polyolefine, SHF2, standard colour black - other colours on request - rip cord under sheath	IEC 60092-360

● Flame-retardant ● Fire-resistant ● Halogen-free ● Low smoke emission ● Oil resistant (only SHF2)

Application: For fixed installation in most areas and on open deck in ships and off shore units. If the cable is exposed to direct sun light protective covering or cable with black outer sheath is recommended.

Main characteristics

Rated voltage	150/250V (300V)
Flame-retardant	IEC 60332-1-2 –test for single insulated wire and cable IEC 60332-3-22 –test for bunched wires and cables, category A
Fire-resistant	IEC 60331-1 or IEC 60331-2
Halogen-free	IEC 60754 series
Smoke emission	IEC 61034 series
Oil resistance (only SHF2)	IEC 60811-404 conditions according to 60092-360/SHF2

Electrical data:	0,75mm ²	1,5mm ²	Unit
Loop resistance of pair, max. / +20°C	52	24,4	ohm/km
Pair capacitance, nom. / 1 KHz	45	55	nF/km
Loop inductance, nom.	0,6	0,7	mH/km
Insulation resistance / +20°C	≥1500	≥1500	Mohm/km

Temperature rating: Maximum conductor temperature **+ 90 °C**
Fixed installation **- 40 °C to +80 °C**
Minimum recommended installation temperature **- 15 °C**

For details see general information section

RFE-FRHF 250V	Number of conductors & cross-section n x mm²	Nominal outer diameter mm	Approx- imate weight kg/km	Min. bending radius fixed installation mm
Part number				
20520	1x2x0,75	9,0	115	55
20522	2x2x0,75 Quad	11,0	170	65
20524	2x2x0,75	14,0	200	85
20526	4x2x0,75	16,0	285	95
20528	7x2x0,75	19,5	445	115
20530	8x2x0,75	21,0	495	125
20532	10x2x0,75	24,0	615	145
20534	12x2x0,75	25,0	685	150
20536	14x2x0,75	26,5	765	160
20538	19x2x0,75	30,5	970	180
20540	24x2x0,75	34,0	1205	205
<hr/>				
20575	1x2x1,5	10,5	155	65
20577	2x2x1,5 Quad	12,0	215	70
20579	2x2x1,5	16,0	300	95
20574	3x2x1,5	17,0	355	100
20581	4x2x1,5	18,5	425	110
20583	7x2x1,5	22,5	650	135
20585	8x2x1,5	24,0	715	145
20587	10x2x1,5	27,0	875	160
20589	12x2x1,5	28,5	1000	170
20591	14x2x1,5	30,5	1125	180
20593	16x2x1,5	32,5	1280	195
20595	19x2x1,5	35,0	1460	210

Other sizes on request.

Part number for oil resistant SHF2 cable:

4 + code from above table → 4xxxxx